



## **HOTSPOT COOLERS**



**Lowers Temperature up to 25° F**  
**Misted Spray up to 140 Feet**  
**Evaporative Cooling at .2 GPM/Fan**


**Industrial Quality Design**  
**Easy Installation/Low Maintenance**  
**Connect up to 5 fans per pump unit**

*Keep your employees happy and cool with Hotspot.*

### **Features:**

- High-velocity fan units—Incredible CFM output!
- Low energy—1 horsepower motor
- Industrial high-pressure pump and rugged metal housing
- All stainless steel tubing
- On/Off control for pump unit
- Type 316 SS manual ball valve per manifold
- 9 foot electrical cord-set—standard 110 VAC
- High & low pressure gauges
- Water filters
- Easy hook-up


## Cooling Distance

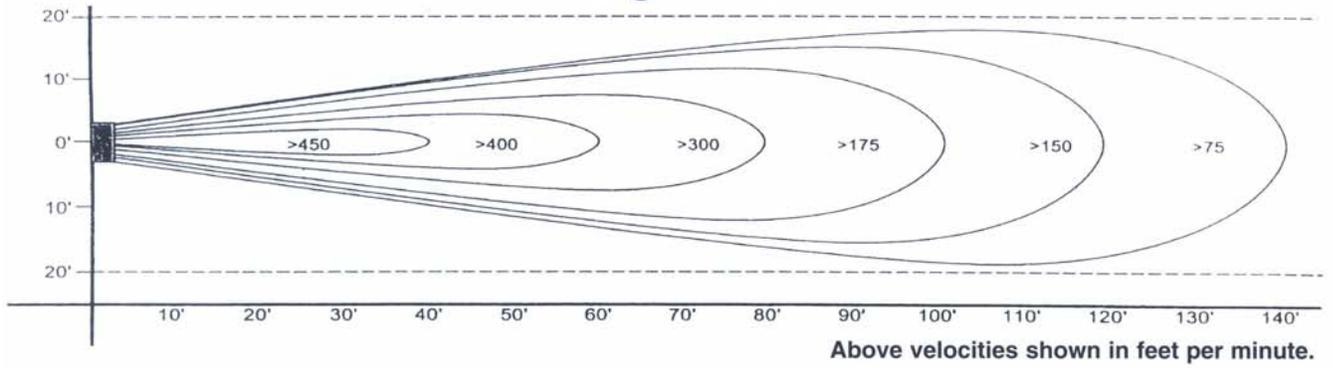

Acceptable Air Motion Levels for Worker Comfort*	
Air Conditioned Space	50-75 fpm
Fixed Work Station: General Ventilation	
Sitting	75-125 fpm
Standing	100-200 fpm

\*Adapted from:  
 "Industrial Ventilation. A Manual of Recommended Practice, 22nd Ed."  
 American Conference of American Hygienists  
 330 Kemper Meadow Dr.  
 Cincinnati, Ohio 45240-1634

## CHOOSE THE FAN MOUNT YOU NEED



### Chain Suspended

Allows fan to be suspended from the ceiling. Fan includes eye-bolts for hanging.



### Pedestal Stroller

Mounted on a wheel base with handle for easy maneuverability.

For more information  
 Contact us at:




### AMERICAN MOISTENING COMPANY

10402 RODNEY STREET  
 P.O. BOX 1066  
 PINEVILLE, NC 28134  
 PHONE 704-889-7281  
 FAX 704-889-7270  
[www.amco.com](http://www.amco.com)  
[amco@amco.com](mailto:amco@amco.com)




MANUFACTURED WITH PRIDE IN  
 U.S.A.  
 OVER 100 YEARS



### Column/Wall Mount

For permanent mounting to wall or column. Heavyweight oscillator assembly available upon request.



### Yoke Mount

Allows fan to be securely mounted to overhead I-beam or any other flat surface.